


BAVARIAN POLYMERS

System Efficient Louver Window

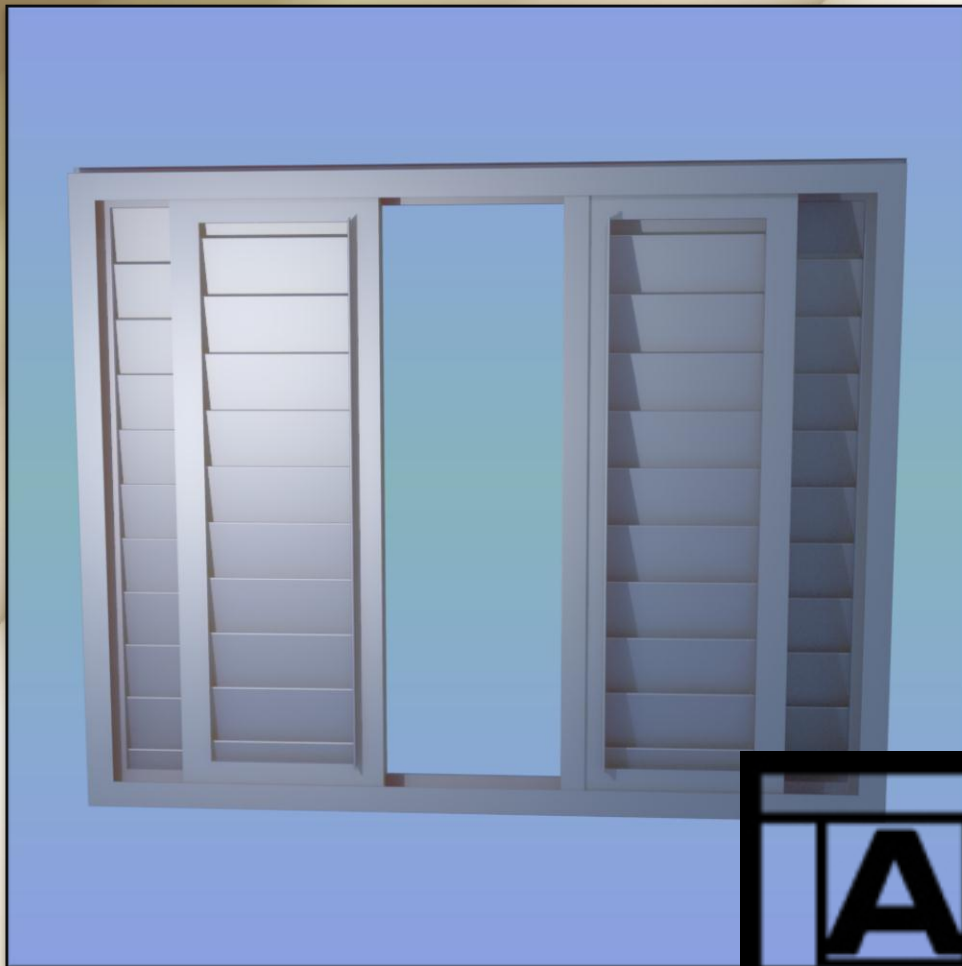

WHITE, TAN OR CLAY – LAMINATES available in either wood grains or color

FEATURES AND BENIFITS

FRAME

- AAMA-approved
- Fusion-welded frame members provide strength, weatherability and longevity
- 67mm (2-5/8") frame depth
- Available configurations: OX, XO, OXO, OXXO
- Designed for optimal screen/mosquito net retention
- 19mm (.750") front flange; can be slit off inline
- Removable panel roller track in sill
- Designed for optimum use of screens/mosquito nets
- Fixed meeting stile can be reinforced for added strength
- Available in White, Beige and Clay

SASH


- AAMA-approved profiles with dual-wall glazing legs; typical wall thickness 1.65mm (.065")
- Exterior-glazed to eliminate water penetration around the glass.
- Durable cam locks for positive engagement and forced-entry resistance
- Sash lifts out for ease of cleaning; adequate take-out clearance provided
- Glazing options from 3mm (.118") single pane to 19mm (3/4") I.G.
- Glass stops snap in perpendicular to the glazing for ease of insertion
- Dual-weatherstripped integral interlocks
- Large interlock hollows for optional high-performance reinforcement

HARDWARE

- Will accept a wide range of locks and keepers
- Will accept many commercially-available rollers, including optional adjustable rollers
- Will accept a wide variety of sill weep hole covers

PERFORMANCE

- Up to AAMA DP40 with the proper reinforcement
- U-value <U0.3 with the proper glazing
- Forced Entry Resistance (FER) rating is dependent on the lock hardware specified

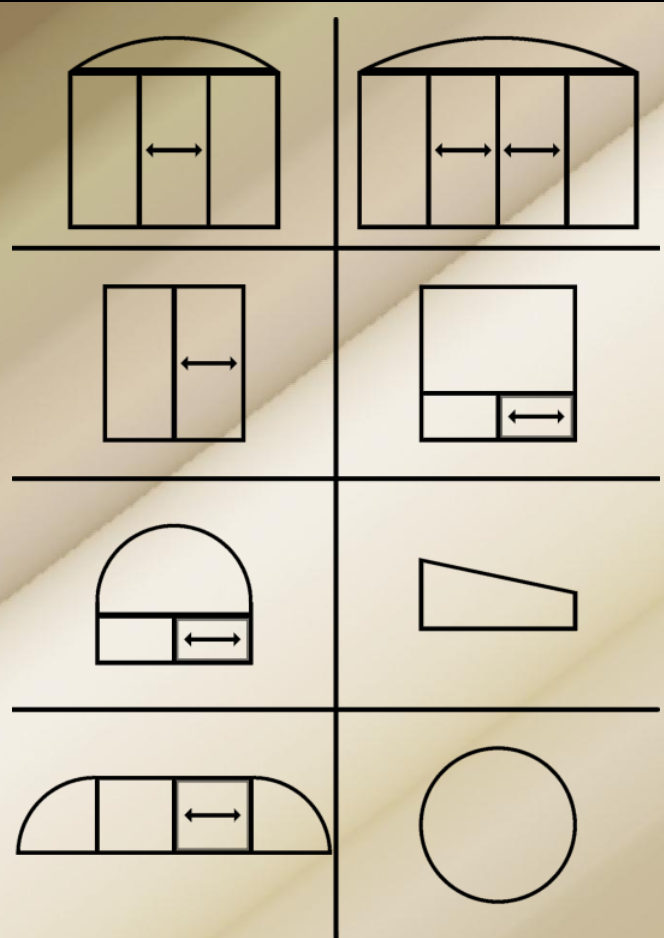

359 Printwood Drive, Dickson, TN 0.7055 – Tel. 615-326-0001
www.bavarianpolymers.com